



Rail Strap example -For more information visit - www.oneslotfencing.net

Screw the strap to the end of the rail
The strap can be rotated if required
We recommend number 8 (4mm diameter shank)
screws at least 50mm long

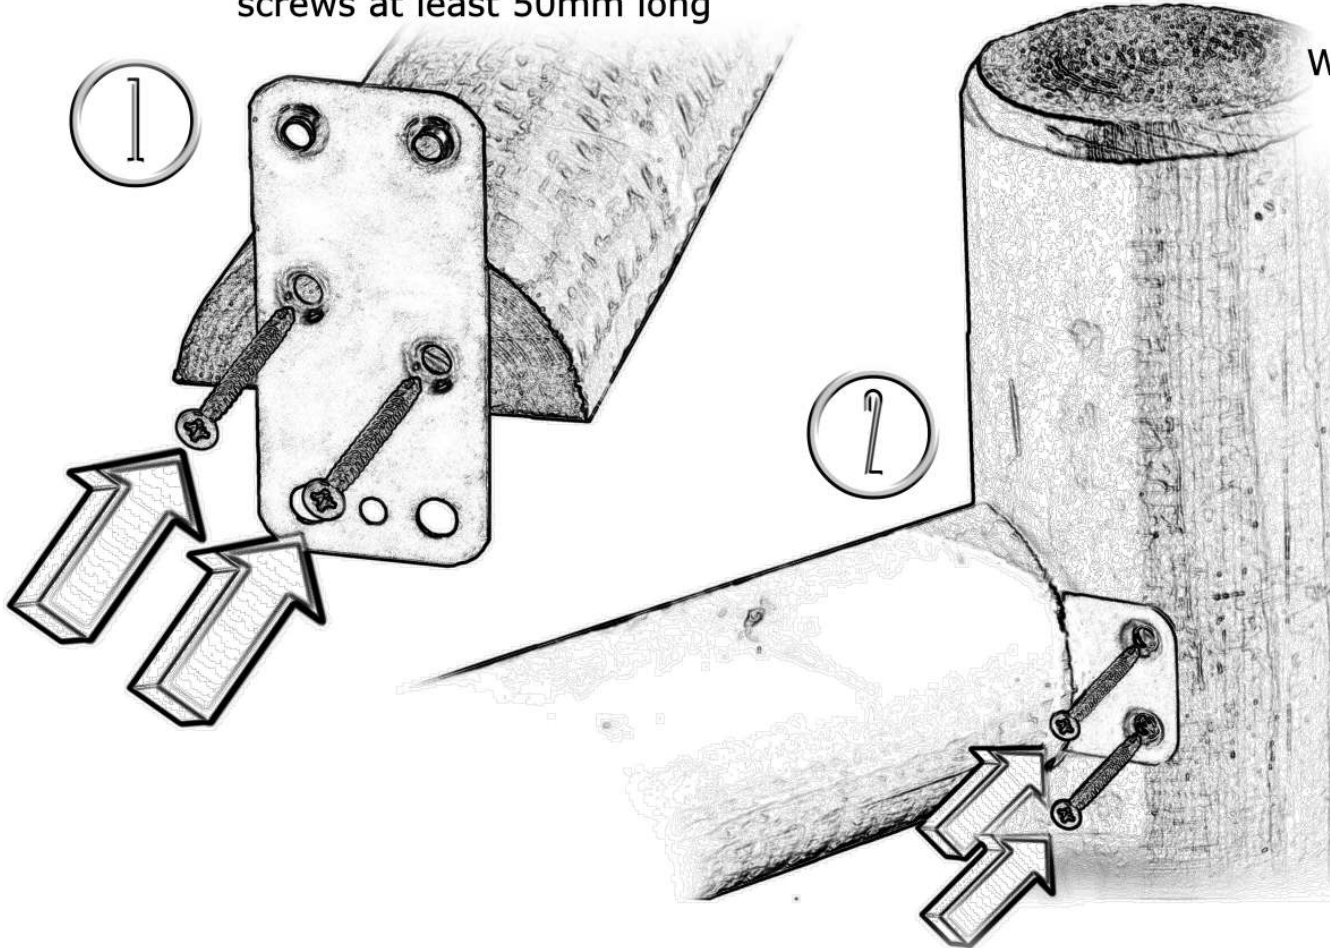

Bend strap to suit post (If necessary)
Fix the central hole
We recommend number 8 (4mm diameter shank)
countersunk screws 40mm long

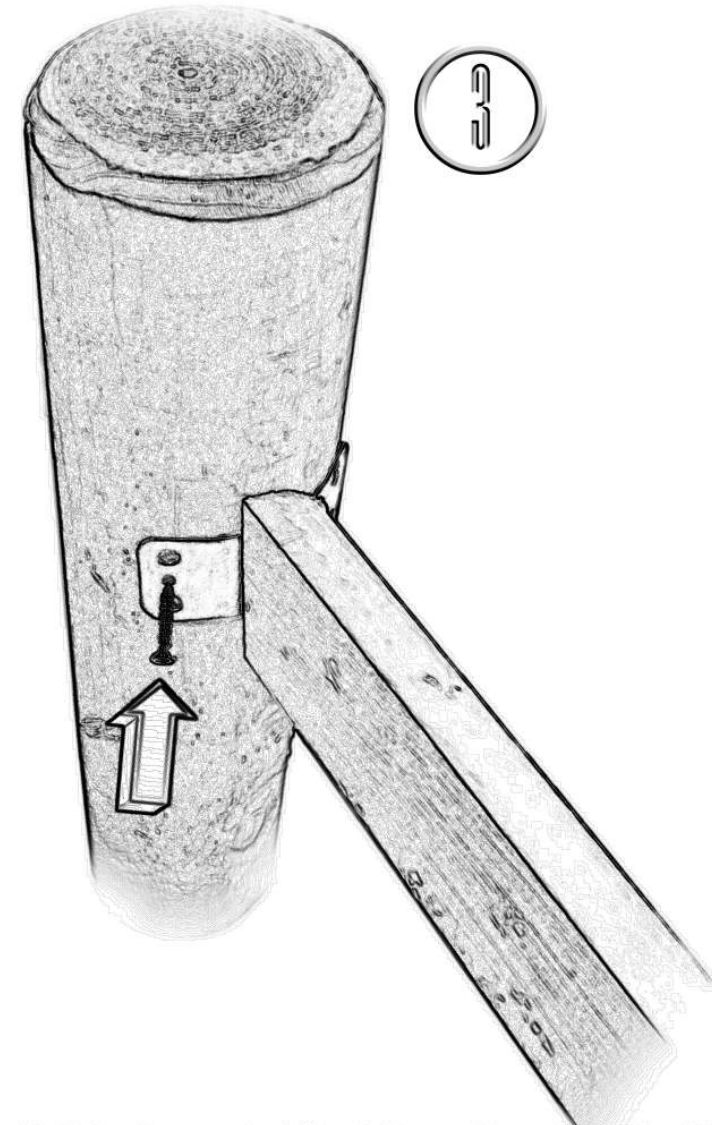

Bend strap to suit post (If necessary)
Fix the two Xtrude holes
We recommend number 8 (4mm diameter shank)
countersunk screws 40mm long

Keep out of reach of children

Handle & install with care: Sheet metal parts may have sharp edges
Wash hands after handling: Parts have a mineral oil protective coating